


Non-corrosive fittings

Installation and Operation Manual

Dimensions

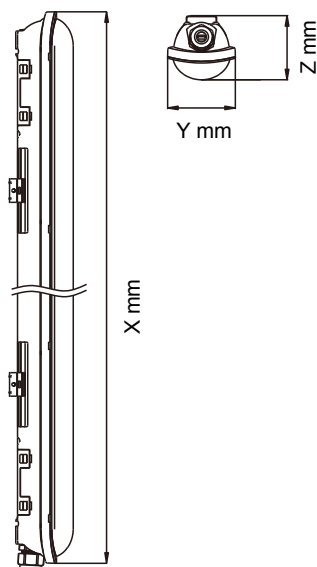

Specifications

Part number	M4NC24/4k	M5NC33/4k
Dimensions	1180x72x68mm	1480x72x68mm
(x, y, z)	4ft	5ft
Power Output	24w	33w
Lumens	2880lm	3960lm
Colour	4000k	
IP Rating	IP65	
Beam Angle	120°	
Energy Rating	A+	
Working Hours	30000h	
CRI	>80	
Frequency	50/60Hz	
Rated voltage	~220-240V	
Power Factor	>0.9	

Installation

1. The installation, maintenance and inspection must be carried out by a qualified electrician for safety reasons. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard.
2. Use H07RN-F, 2x1.0mm² rubber cable.
3. The power supply must be deactivated prior to assembly, maintenance or cleaning processes. Remove the fuse or switch the fuse to OFF and secure from reactivation.
4. Picture 1, screw the gland.
5. Use a screwdriver to open the box.
6. Connect brown wire (L) to terminal L, blue wire (N) to terminal N, connect the grounding wire and green/yellow Earth wire.
7. Terminal box installed back, the terminal box must be installed the correct position.

