

LED Batten fitting

Installation and Operation Manual



Please read the following instructions carefully to ensure that mounting operation will be carried out correctly. These instructions should be properly preserved for future reference.

Specifications

Part number.	M4BF18/4k	M5BF24/4k	M6BF30/4k	M5BF24/6k
Rated voltage	220-240V~			
Frequency	50/60Hz			
Rated power	18W	24W	30W	24W
Lumens	1700lm	2200lm	2700lm	2200lm
Protection class	II			
IP Rating	IP20			
Colour temperature	4000K			6500K

Fitting Instructions

1. This product should only be fitted and maintained by a qualified electrician.
2. Recommended cable is a 2 core 0.5mm. Our fitting is Double Insulated, therefore, an earth is not required.
3. The power supply should be de-activated prior to any assembly taking place. You should switch off the correct circuit at the consumer unit or remove the correct fuse if you have a fuse board.
4. Picture 1: Remove the clips from the back of the fitting and using the screws/rawplugs provided, attach them to the area you wish to fit the light.
5. Picture 2: Use a screwdriver to take off the cover, please keep this safe as you will need to replace it once you have connected the wires to the fitting.
6. Picture 3: Connect brown wire (L) to terminal L, blue wire (N) to terminal N.
7. Replace the cover removed in Picture 2
8. Push the fitting back into the clips as per no 4.
9. Once this has been done, and you are happy it is safe, you may restore the power and test the fitting.

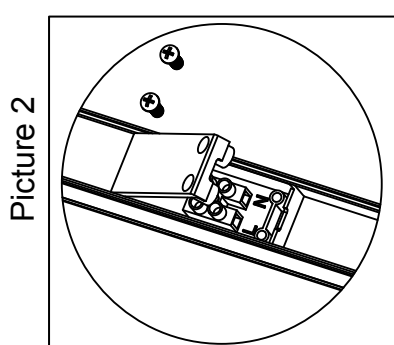

Picture 3

